

DOORS - B-RATED MS / MC


The doors are supplied complete with top element (option), frame, counter frame, door leaf, stainless steel threshold and hardware. Built-in re-inforcement for door closer in top of door leaf as standard.




Integrated door close (option)



Integrated drop-down threshold (option)

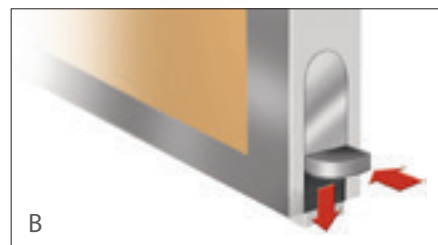


Description	MS	MC
Fire class	C-class	B-15 **
Surface doorleaf	0.6 mm steel sheets	200 - 250 - 300 mm
Frame (and top element)	Painted, NCS & RAL colours	50 - 5000 mm
Thickness doorleaf	38 mm	Rockwool
Weight (c.o. 750 mm)	57kgs	25 + 50 mm
Core material	Rockwool 150 kg/m ³	31 + 40 kg/m ³
Clear light opening	Width: Standard up to 800 mm Height: Standard up to 2000 mm	
Element height	Up to 3000 mm	Up to 3000 mm
Sound reduction	R _W =30 dB	R _W =41 dB
Standard specification	Doorleaf PVC / PVC, hinges, frame, counterframe, overpanel, lockcase with handle, escutcheon and stainless steel threshold.	

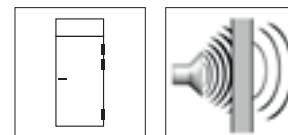


Top panel


41 dB



Single door



Kickout panel



Ventilation louvre