

WALLS


CSG-600 / 70

The use of additional insulation between the two panels of a CS-600/70 wall improves the sound reduction by an amazing 4dB compared to CS system on page 15.


Note that building thickness is not more than 70 mm.

Weight

All weights are based on system weight, including all profiles.

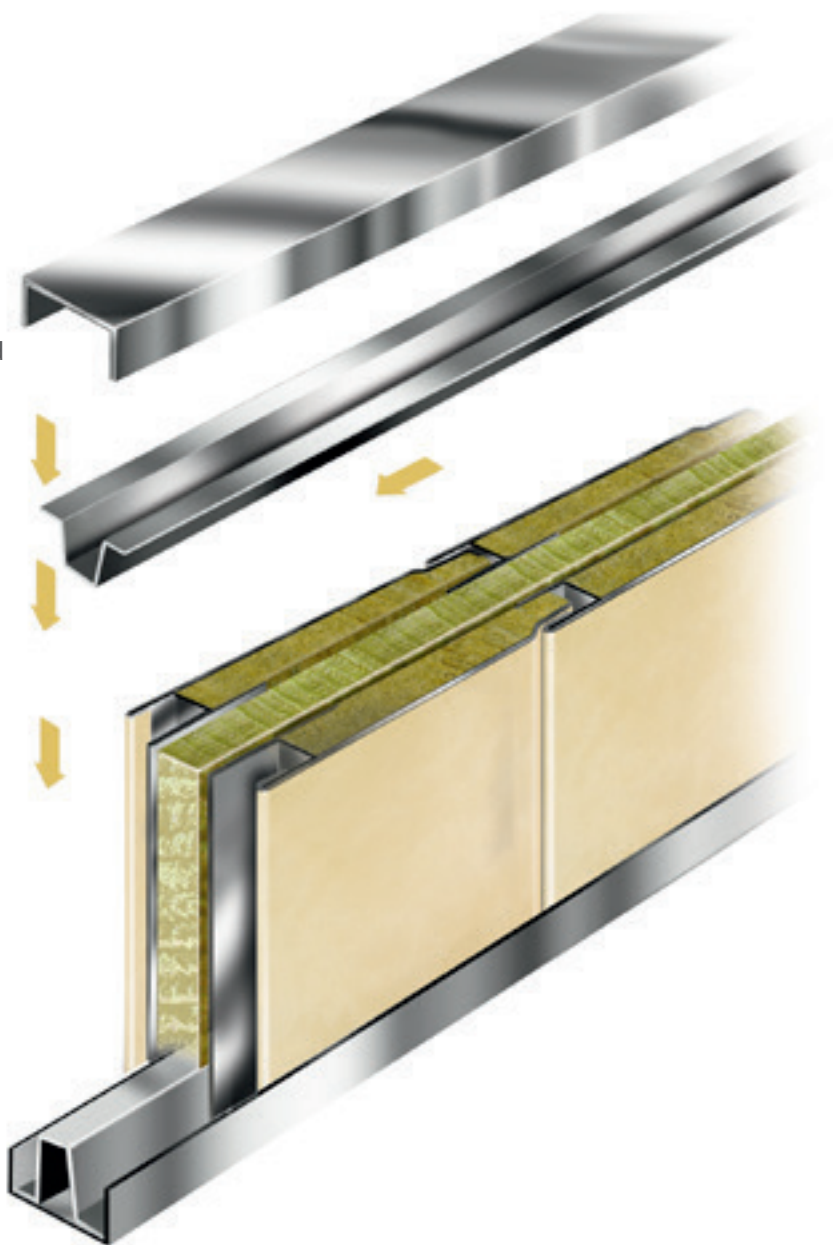

Description	CSG-600 / 50
Fire class	B-15 / B-30
Standard width	600 mm
Module length	up to 3000 mm
Module width	600 mm
Thickness	70 mm
Weight	34.4 kg/m ²
Sound reduction	R _w =53 dB
Thermal isolation	U=0.47 W/m ² K
Application	Partition

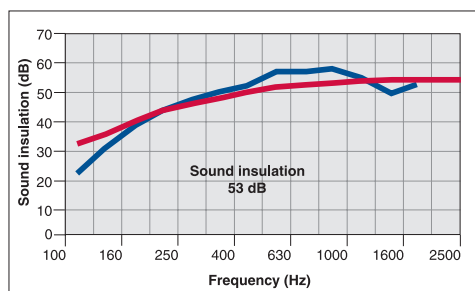

— Adjusted References — Sound Reduction Index (Laboratory measurement)

